



Ioda LED

Harmony in form and light

NEW DALI

REGIOLUX

Ioda - now in DALI version

LED downlight family for ceiling recessing

Robust die-cast aluminium housing, with ballast ready for operation

Direct light distribution with opal diffuser

Light colour optional warm white or neutral white


Pragmatic and economic solution



Ioda: ready for operation connecting kit



Robert E. Jürgens, Regiolux GmbH Königsberg DE · Sporthalle Bergtheim, DE

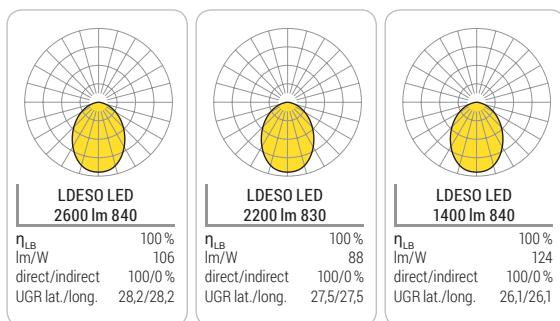

www.regiolux.de

www.regiolux.de/en/products/Downlights/Ioda



Regiolux GmbH
Hellinger Straße 3
97486 Königsberg
T +49 9525 89 0

Products

Type	Lamps	P _{sys} [W]	Color	Ballast	DxH	DA ¹⁾	Et ²⁾	DS ³⁾ min/max	Item number	€ exkl. MwSt.	kg
<i>Diffusor opal direkt breitstrahlend</i>											
Ioda-LDES0	LED 1200 830	12	ws	ET	204 x 74	190	105	10 - 20	3767 0214 140	69,00	1,10
	LED 1400 840	12	ws	ET	204 x 74	190	105	10 - 20	3767 0204 140	69,00	1,10
	LED 2200 830	25	ws	ET	204 x 74	190	105	10 - 20	3767 0114 140	69,00	1,10
				DALI	204 x 74	190	105	10 - 20	3767 0116 640	104,00	1,10
	LED 2600 840	25	ws	ET	204 x 74	190	105	10 - 20	3767 0104 140	69,00	1,10
				DALI	204 x 74	190	105	10 - 20	3767 0106 640	104,00	1,10

¹⁾ Diameter of cut for recessed luminaires

²⁾ Mounting depth (necessary depth for luminaire mounting)

³⁾ Minimum/maximum ceiling thickness with suspended ceiling

For information about the manufacturer's warranty please go to http://www.regiolux.de/fileadmin/REGIOLUX/Service/Garantie/Warranty_LED_en.pdf