



Anwendungsbereiche

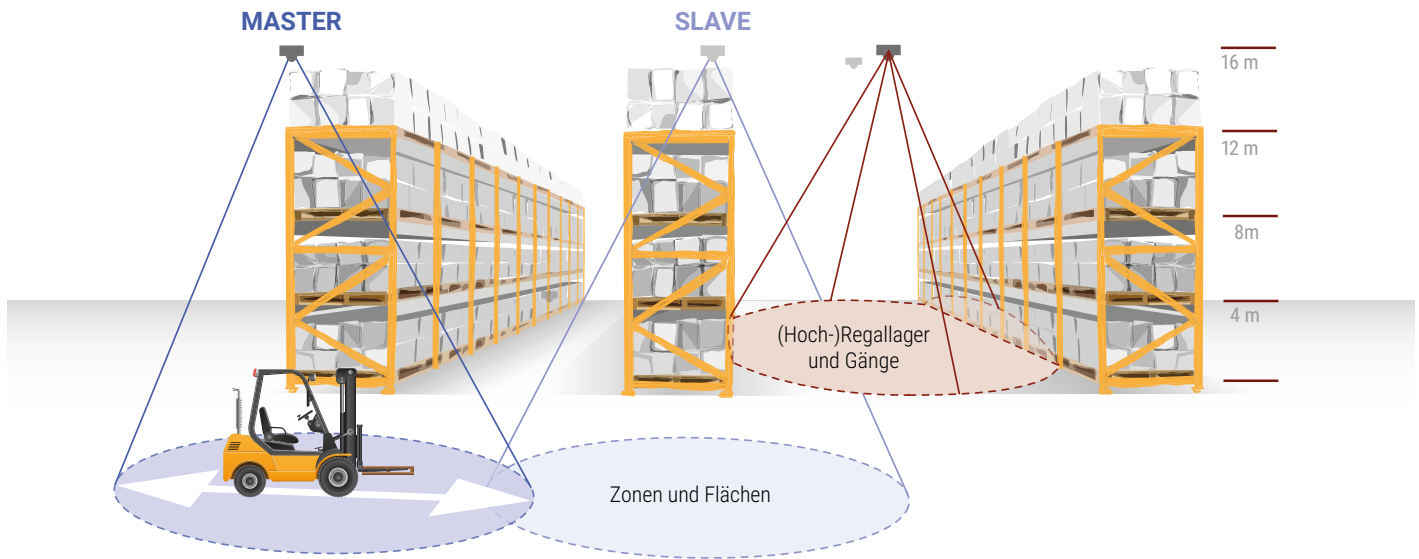

		Schutzart IP20/IP54					
		Erfassungsbereich					
Steuersignal	Montagehöhe	Master	Slave	Master	Slave	Betriebsgeräte max.	
	DALI	5-16 m	easy07	easy20		40	
	DALI	2-10 m			easy15	easy19	40
	DALI	4-14 m	easy21	easy22	easy23	easy24	30
	Schalten	4-14 m	easy49		easy48		400W
	DALI	5-16 m	flex39	flex37		32	
	DALI2	5-16 m	pro08/09				
		2-10 m			pro13		
		2-5 m			pro14		
KNX	5-16 m	pro47					