



Field of Application

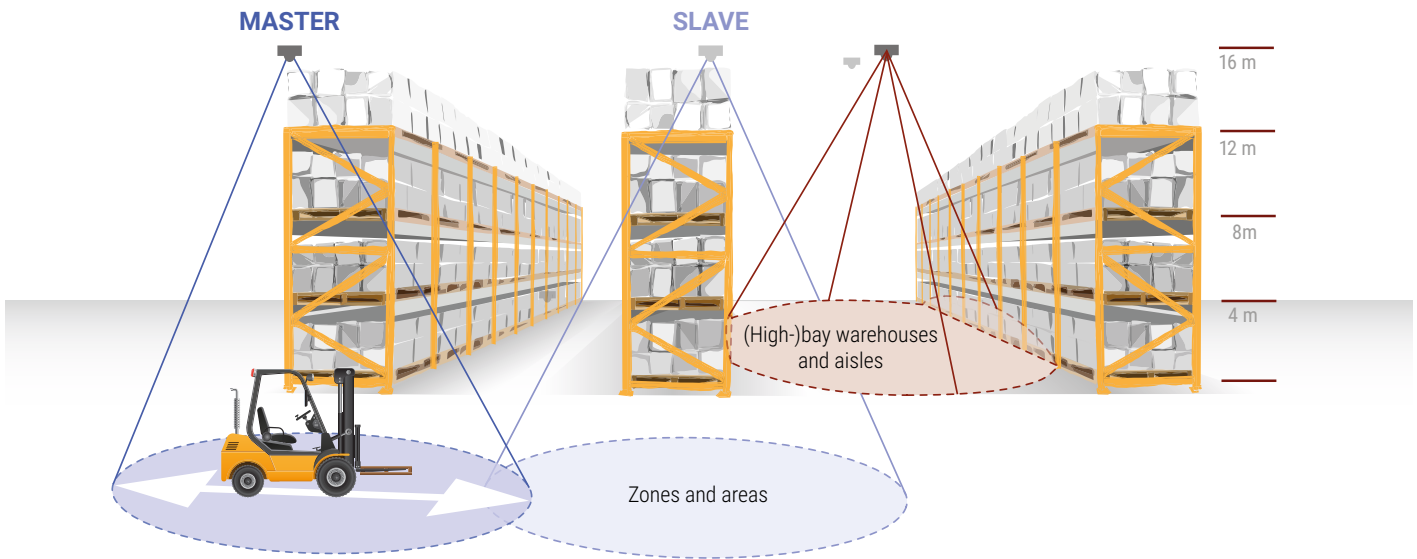

		Protection rating IP20/IP54					
		Detection range					
Controllers	Installation height	Master	Slave	Master	Slave	driver max. load	
	DALI	5-16 m	easy07	easy20		40	
	DALI	2-10 m			easy15	easy19	40
	DALI	4-14 m	easy21	easy22	easy23	easy24	30
	Switched	4-14 m	easy49		easy48		400W
	DALI	5-16 m	flex39	flex37		32	
	DALI2	5-16 m	pro08/09				
		2-10 m		pro13			
		2-5 m		pro14			
KNX	5-16 m	pro47					