



# Domaines d'application

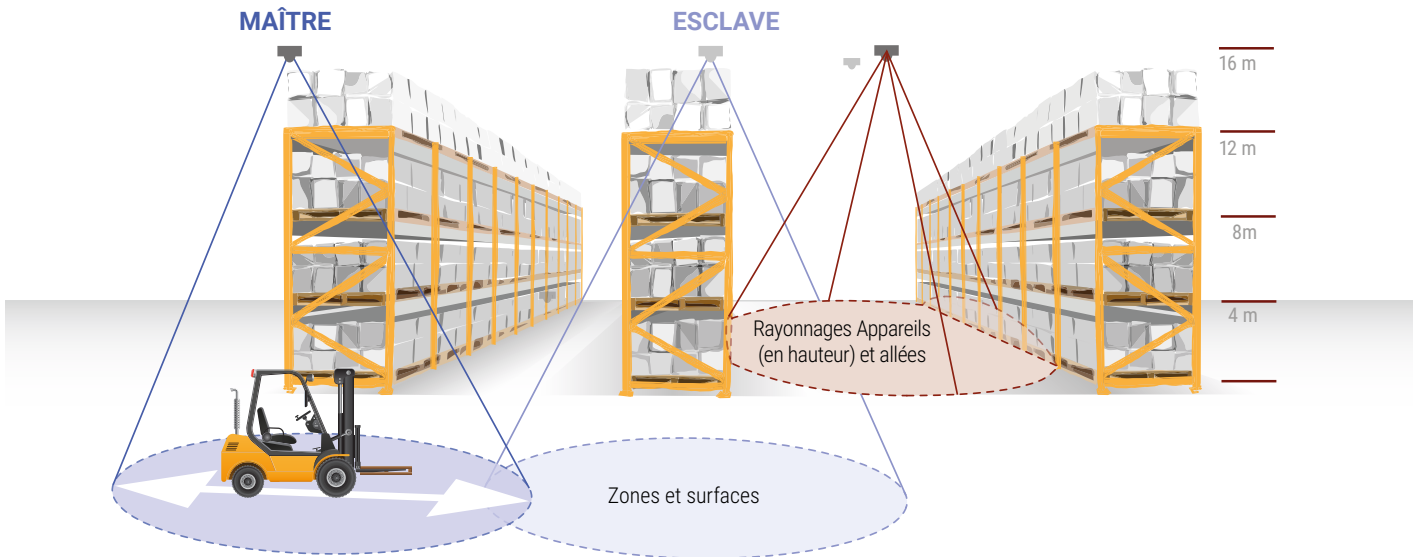

		Type de protection IP20/IP54					
		Couverture					
Signal de commande	Hauteur de montage	Maître	Esclave	Maître	Esclave	Ballast max.	
	DALI	5-16 m	easy07	easy20		40	
	DALI	2-10 m			easy15	easy19	40
	DALI	4-14 m	easy21	easy22	easy23	easy24	30
	Commutation	4-14 m	easy49		easy48		400W
	DALI	5-16 m	flex39	flex37		32	
	DALI2	5-16 m	pro08/09				
		2-10 m		pro13			
		2-5 m		pro14			
	KNX	5-16 m	pro47				