

Accessories - Controller - netlife module for pirola

Housing with a smooth surface made of polycarbonate. Cable entry on front with twist-fix bayonet closure; with click-lock catch on the side. Housing colour white, similar to RAL 9003; Light Control: netlife flex10X; Regiolux Classification: netlife flex; Control signal: DALI, Radio; Number of control gear (max): 32; Communication: Bluetooth; App name: Casambi, 4remote BT; System compatibility: easy01S; flex10; flex10X; flex10L; flex37; flex39; Note: compatible with Casambi; Application: Office, Meeting rooms, Secondary rooms, Retail, Industry, Logistics centres, Corridors, Garages, Classrooms; Function: Motion detection\*, Corridor function\*, Guided Light\*, HCL (only with DT8 luminaires), presence detection\*, Daylight control\*, Tunable white (only with DT8 luminaires), Manual dimming, \*only by auxiliary devices. Controller module for pirola DALI.

## CHARACTERISTICS

|                               |   |
|-------------------------------|---|
| Order number                  | 50119001100                                 |
| EAN number                    | 4020863391110                               |
| Commodity code                | 85365080                                    |
| Certification mark            | IP 65, Protection class I, F, D, Indoor, CE |
| Impact resistance (IK rating) | IK08 (0°C bis 45°C)                         |
| Ambient temperatur            | ta 0°C to 45°C                              |
| Warranty period               | 5 years                                     |

## ELECTRICAL ENGINEERING

|               |           |
|---------------|-----------|
| System output | 2W        |
| Mains voltage | 230V/50Hz |

## LIGHTING TECHNOLOGY

|                  |                  |
|------------------|------------------|
| LED service life | 50000h (Tq 45°C) |
|------------------|------------------|

## MECHANICS



|                        |   |
|------------------------|---|
| Housing colour         | white, similar to RAL 9003  |
| Dimensions (LxWxH/DxH) | 100mm x 87mm x 66mm   |
| Weight (net)           | 0.25kg  |
| Cable entry KE         | at the end  |
| Type of installation   | Ceiling-mounted single installation, Pendant individual mounting, Wall mounting, Mounting rail installation |

## Dimensions

|   |        |        |
|---|--------|--------|
| L | 100 mm | Length |
| B | 87 mm  | Width  |
| H | 66 mm  | Height |

## DEEP-LINK

<https://www.regiolux.de/en/article/50119001100>

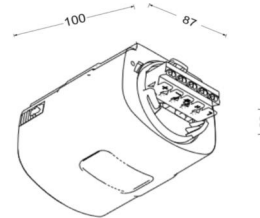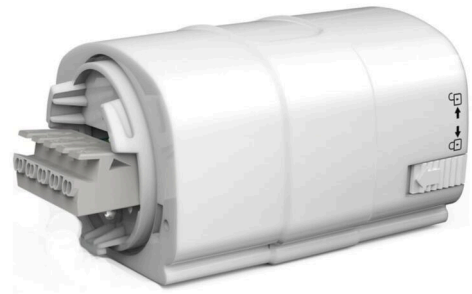

## LC SYSTEM

### CHARACTERISTICS

|                                     |   |
|-------------------------------------|---|
| <b>Regiolux Classification</b>      | netlife flex  |
| <b>Control signal</b>               | DALI, Radio   |
| <b>Number of control gear (max)</b> | 32  |
| <b>Communication</b>                | Bluetooth   |
| <b>App name</b>                     | Casambi, 4remote BT   |
| <b>System compatibility</b>         | easy01S; flex10; flex10X; flex10L; flex37;<br>flex39  |
| <b>Note</b>                         | compatible with Casambi   |
| <b>Application</b>                  | Office, Meeting rooms, Secondary rooms,<br>Retail, Industry, Logistics centres,<br>Corridors, Garages, Classrooms   |
| <b>Function</b>                     | Motion detection*, Corridor function*,<br>Guided Light*, HCL (only with DT8<br>luminaires), presence detection*, Daylight<br>control*, Tunable white (only with DT8<br>luminaires), Manual dimming, *only by<br>auxiliary devices |

