

Slave sensor

Slave sensor presence for ceiling surface mounting. Presence sensor, slave sensor with circular and long-range monitoring area, surface mounting, for master/slave combination. Only one master for light switching necessary; motion detection in all room segments possible with slave sensors; switching pulse to the master in the case of detected movement; recognition of the motion independent of ambient brightness Safety cage and IP54 base optional.

CHARACTERISTICS

Order number	84506005100
EAN number	4020863269914
Commodity code	90328900
Certification mark	IP 54, Protection class II, CE

ELECTRICAL ENGINEERING

Mains voltage	110-240V/50-60Hz
---------------	------------------

MECHANICS



Housing colour	white
Dimensions (LxWxH/DxH)	101mm x 76mm
Weight (net)	0.202kg
Type of installation	Ceiling-mounted single installation

Dimensions

H	76 mm	Height
D	101 mm	Diameter

DEEP-LINK


<https://www.regiolum.de/en/article/84506005100>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	Slave signal
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	2m to 10m
System compatibility	easy06; easy15
System extension	easy19
Application	Industry, Logistics centres, Garages, Corridors
Function	Motion detection, presence detection

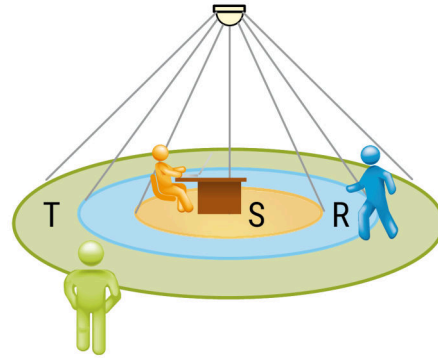

MONITORING AREA

Mounting Height	3,5m	10m
Ø max. sitting[S]	9m	-
Ø max. radial[R]	-	16m
Ø max. tangential[T]	-	48m

