

Accessories - Wire suspension

Rectangular canopy L=317mm, metal ceiling cylinder, 2 wires D=1.2mm L=1900mm, 2 cross-spans L=190mm, transparent connection cable Housing colour silver grey/transparent; Light Control: netlife flex10X; Regiolux Classification: netlife flex; Control signal: DALI, Radio; Number of control gear (max): 32; Communication: Bluetooth; App name: Casambi, 4remote BT; System compatibility: easy01S; flex10; flex10X; flex10L; flex37; flex39; Note: compatible with Casambi; Application: Office, Meeting rooms, Secondary rooms, Retail, Industry, Logistics centres, Corridors, Garages, Classrooms; Function: Motion detection\*, Corridor function\*, Guided Light\*, HCL (only with DT8 luminaires), presence detection\*, Daylight control\*, Tunable white (only with DT8 luminaires), Manual dimming, \*only by auxiliary devices. With basicDIM wireless controller for DALI DT6, DT8, for stail SHL. LED. Suspension set with integrated receiver, rectangular canopy, individual steel cable suspension with connection cable 5x0.75mm², suitable for suspended luminaires with DALI controllers,; With basicDIM wireless controller for DALI DT6, DT8, for hokal, procube, cubus LED/T5, lens basic, stail SHL.light run, agila and kayak. Operation and configuration via the Casambi app.

CHARACTERISTICS

Order number	91211125135
EAN number	4020863422920
Commodity code	94059900
Certification mark	Indoor, CE

ELECTRICAL ENGINEERING

Wiring	5x0.75mm²
--------	-----------

MECHANICS



Housing colour	silver grey/transparent
Dimensions (LxWxH/DxH)	317mm x 44.5mm x 39mm
Weight (net)	0.6kg
Type of installation	Pendant individual mounting, Pendant light strip mounting

Dimensions

L	317 mm	Length
B	44.5 mm	Width
H	39 mm	Height

DEEP-LINK

<a href="https://www.regiolux.de/en/article/91211125135">https://www.regiolux.de/en/article/91211125135</a>
---

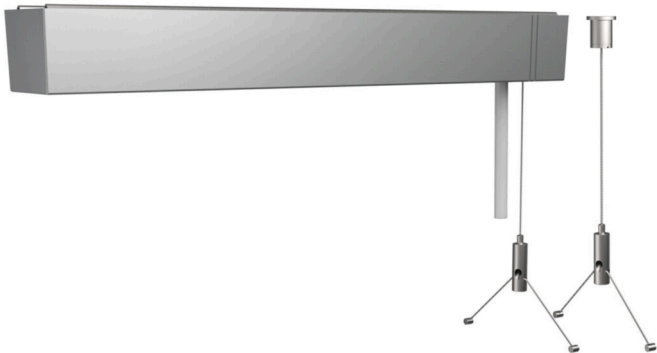

LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife flex
Control signal	DALI, Radio
Number of control gear (max)	32
Communication	Bluetooth
App name	Casambi, 4remote BT
System compatibility	easy01S; flex10; flex10X; flex10L; flex37; flex39
Note	compatible with Casambi
Application	Office, Meeting rooms, Secondary rooms, Retail, Industry, Logistics centres, Corridors, Garages, Classrooms
Function	Motion detection*, Corridor function*, Guided Light*, HCL (only with DT8 luminaires), presence detection*, Daylight control*, Tunable white (only with DT8 luminaires), Manual dimming, *only by auxiliary devices

