

Suspended luminaire/light run - Single micro louvre with 80° lens - direct asymmetrical distribution

Enclosure of sheet steel in a delicate square design; luminaire connector made of steel; Housing colour traffic white RAL 9016; Light distribution directly asymmetrically radiating by means of a clear LED lens with single micro louvre, white. Electrical connection via start luminaire with 5-pin connection cable and light-run luminaires with through-wiring. Luminaire can only be operated in conjunction with a single luminaire. Complete height-adjustable suspension set, luminaire connector and DV are included in the scope of delivery. Black housing possible on request.

**CHARACTERISTICS**

Order number	60685046630
EAN number	4020863467563
Commodity code	94051190
Certification mark	IP 20, Protection class I, F, Indoor, CE
Impact resistance (IK rating)	IK02
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

**ELECTRICAL ENGINEERING**

Controller	Electronic driver DALI2 (1 pcs.)
System output	36W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	12 pieces/B10, 20 pieces/B16, 21 pieces/C10, 33 pieces/C16
Energy efficiency class/light source	B

**LIGHTING TECHNOLOGY**

Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RG1
Nominal luminous flux	4659lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	129lm/W
UGR lat./long.	24.6 / 21.5

**MECHANICS**



Housing colour	traffic white RAL 9016
Dimensions (LxWxDxH)	1411mm x 51mm x 69mm
Weight (net)	3.7kg
Type of installation	Pendant light strip mounting

**Dimensions**


L	1411 mm	Length
B	51 mm	Width
H	69 mm	Height
A2	1300 mm	Mounting distance 1st luminaire of the light run
A3	1400 mm	Mounting distance between luminaires in a light run arrangement
P min	150 mm	Minimum suspension length
P max	1900 mm	Maximum suspension length

**DEEP-LINK**

<https://www.regiolum.de/en/article/60685046630>

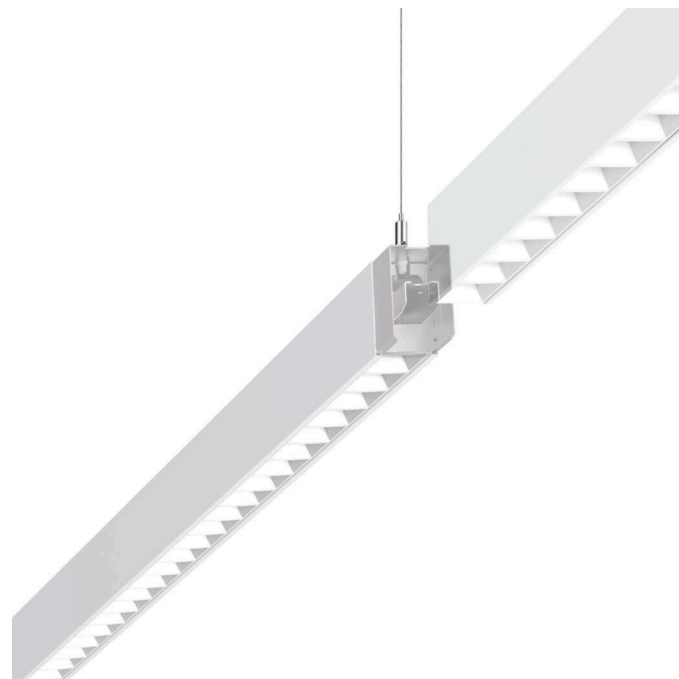

Reference	LED 4700lm 840
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	24.6 / 21.5



- 1 Pendel-Einzelleuchte / Suspended individual luminaire
- 2 Pendel-Lichtband / Suspended light run

