

Pendant luminaire - Silky matt MIRO-SILVER® micro-parabolic louvres - direct/indirect distribution - equipped for light run installation

Sheet steel housing, flat rectangular cross section, visible installation height 26 mm, end faces made of steel, prepared for light run installation; Housing colour silver grey/white aluminium RAL 9006; Direct/indirect light distribution using reflectivity-enhanced MIRO-SILVER® aluminium micro-parabolic louvre, silk-matt with low-section cross blades, for computer workstations, $65^\circ < 1500 \text{ cd/m}^2$ omnidirectional glare reduction according to the current DIN EN 12464-1 standard, self-engaging; Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts. Required accessories: Y-wire suspension for/without electrical connection must be ordered separately. Recommended minimum pendant length 0.5 m.

CHARACTERISTICS

Order number	60332026665
EAN number	4020863322442
Commodity code	94051190
Certification mark	IP 20, Protection class I, VDU 65° < 1500, F, Indoor, CE
Impact resistance (IK rating)	IK03
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

ELECTRICAL ENGINEERING

Controller	Electronic driver DALI2 (1 pcs.)
System output	43W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	13 pieces/B10, 24 pieces/B16, 25 pieces/C10, 40 pieces/C16
Energy efficiency class/light source	C

LIGHTING TECHNOLOGY

Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Nominal luminous flux	5514lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	129lm/W
UGR lat./long.	17.9 / 17.1

MECHANICS



Housing colour	silver grey/white aluminium RAL 9006
Dimensions (LxWxH/DxH)	1240mm x 198mm x 37mm
Weight (net)	4.233kg
Type of installation	Pendant individual mounting, Pendant light strip mounting

Dimensions

L	1240 mm	Length
B	198 mm	Width
H	37 mm	Height
A1	1216 mm	Mounting distance single mounting
A2	1279 mm	Mounting distance 1st luminaire of the light run
A3	1342 mm	Mounting distance between luminaires in a light run arrangement
P min	150 mm	Minimum suspension length
P max	1900 mm	Maximum suspension length

DEEP-LINK

<https://www.regiolum.de/en/article/60332026665>

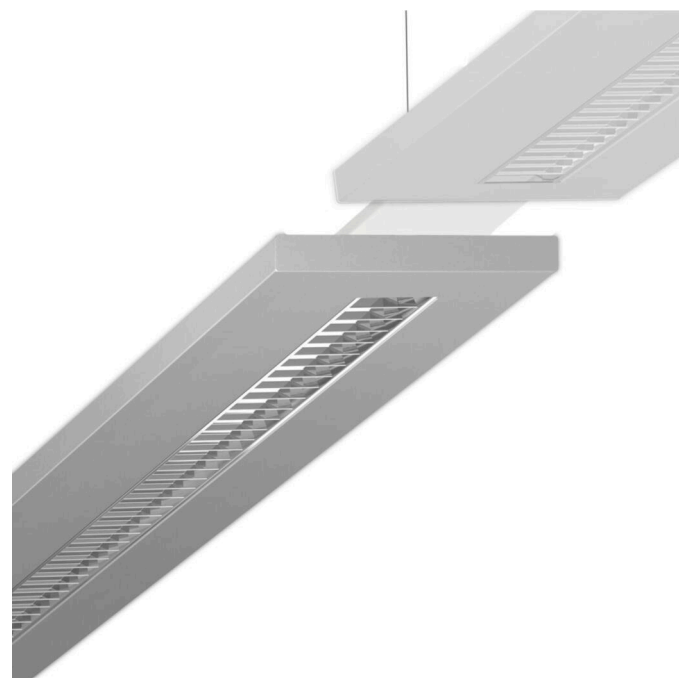

Reference	LED 5500lm 840
ηLB	100 %
Φ ↓/↑	62 % / 38 %
UGR lat./long.	17.9 / 17.1
VDU	65° < 1500cd/m²

