

Variable Device mount functional module netlife light management

Device mount made of a galvanised, profiled steel sheet; surface with polyester resin enamel coating; with two rotary catches for rapid fitting in the mounting rail, for the integration of sensors and control unit in the light run; can be positioned variable on the mounting rail. Housing colour traffic white RAL 9016; Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife easy23; Regiolux Classification: netlife easy; Control signal: DALI2-broadcast; Number of control gear (max): 30; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 4m to 14m; Monitoring area: max. D=20m; Remote control: 84501101203; Optional remote control: 84501101200 +App; App name: Steinel smart remote; System extension: easy24; Application: Industry, Logistics centres, Corridors, Garages; Function: Motion detection, Corridor function, Manual dimming, Daylight control. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife easy system; straightforward in-house project engineering; easy installation; preset functions; simple commissioning via remote control, app, DIP switch, rotary knob, etc.

CHARACTERISTICS

| | |
|--------------------|---|
| Order number | 19150700230 |
| EAN number | 4020863421411 |
| Commodity code | 90328900 |
| Certification mark | IP 20, Protection class I, F, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE |
| Special properties | Advanced Services |

ELECTRICAL ENGINEERING

| | |
|---------------|-----------|
| Controller | easy23 |
| Mains voltage | 230V/50Hz |

MECHANICS



| | |
|------------------------|---|
| Housing colour | traffic white RAL 9016 |
| Dimensions (LxWxH/DxH) | 765mm x 95mm x 88mm |
| Weight (net) | 0.9kg |
| Type of installation | Mounting rail system installation, Light structure |

Dimensions

| | | |
|---|--------|--------|
| L | 765 mm | Length |
| B | 95 mm | Width |
| H | 88 mm | Height |

DEEP-LINK


<https://www.regiolux.de/en/article/19150700230>



LC SYSTEM

CHARACTERISTICS

| | |
|-------------------------------|--|
| Regiolux Classification | netlife easy |
| Control signal | DALI2-broadcast |
| Number of control gear (max) | 30 |
| Communication | Wired |
| Sensor technology | PIR - passive infrared |
| Installation height (min/max) | 4m to 14m |
| Remote control | 84501101203 |
| Optional remote control | 84501101200 +App |
| App name | Steinel smart remote |
| System extension | easy24 |
| Application | Industry, Logistics centres, Corridors, Garages |
| Function | Motion detection, Corridor function, Manual dimming, Daylight control |

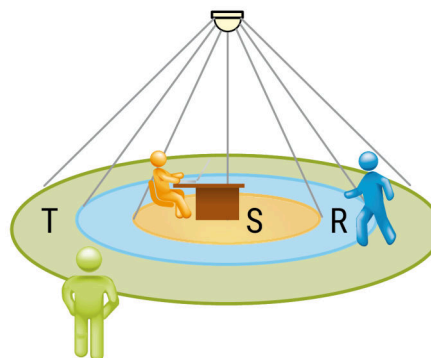

MONITORING AREA

| | | | |
|----------------------|-------|-------|-----|
| Mounting Height | 5m | 10m | 14m |
| Ø max. sitting[S] | - | - | - |
| Ø max. radial[R] | 11m | 14,5m | - |
| Ø max. tangential[T] | 34,5m | 28m | 20m |

