

IP 54 variable Device mount functional module netlife light management

Device mounts made of galvanised, profiled sheet steel with zinc coating combined with polyester resin paint guarantee good corrosion protection; tool-free attachment with integrated rotary catches for rapid fitting in the support rail. Integrated end faces made of plastic with sealing lips and an all-round closed seal to the support rail for a protection type up to IP54. For integrating sensor technology and the control unit into the light run; can be positioned variably in the support rail. Housing colour traffic white RAL 9016; Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife easy19; Regiolux Classification: netlife easy; Control signal: Slave signal; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 2m to 10m; Monitoring area: max. D=48m; System compatibility: easy06; easy15; System extension: easy19; Application: Industry, Logistics centres, Garages, Corridors; Function: Motion detection, presence detection. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. The easy 19 functional modules should be combined with the SRT support rail with feed-through wiring 5x2.5 / 6x1.5 mm<sup>2</sup>. netlife easy system; straightforward in-house project engineering; easy installation; preset functions; simple commissioning via remote control, app, DIP switch, rotary knob, etc.

## CHARACTERISTICS

Order number	19152700190
EAN number	4020863421497
Commodity code	90328900
Certification mark	IP 54, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE
Special properties	Advanced Services

## ELECTRICAL ENGINEERING

Controller	easy19
Mains voltage	230V/50Hz

## MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	765mm x 102mm x 99mm
Weight (net)	0.9kg
Type of installation	Mounting rail system installation, Light structure

## Dimensions

L	765 mm	Length
B	102 mm	Width
H	99 mm	Height

## DEEP-LINK


<https://www.regiolux.de/en/article/19152700190>



## LC SYSTEM

### CHARACTERISTICS

<b>Regiolux Classification</b>	netlife easy
<b>Control signal</b>	Slave signal
<b>Communication</b>	Wired
<b>Sensor technology</b>	PIR - passive infrared
<b>Installation height (min/max)</b>	2m to 10m
<b>System compatibility</b>	easy06; easy15
<b>System extension</b>	easy19
<b>Application</b>	Industry, Logistics centres, Garages, Corridors
<b>Function</b>	Motion detection, presence detection

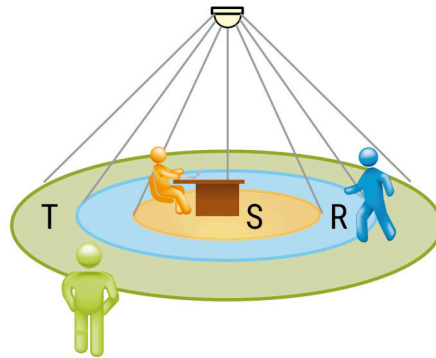

### MONITORING AREA

<b>Mounting Height</b>	3,5m	10m
<b>Ø max. sitting[S]</b>	9m	-
<b>Ø max. radial[R]</b>	-	16m
<b>Ø max. tangential[T]</b>	-	48m

