

IP 54 variable Device mount functional module netlife light management

Device mounts made of galvanised, profiled sheet steel with zinc coating combined with polyester resin paint guarantee good corrosion protection; tool-free attachment with integrated rotary catches for rapid fitting in the support rail. Integrated end faces made of plastic with sealing lips and an all-round closed seal to the support rail for a protection type up to IP54. For integrating sensor technology and the control unit into the light run; can be positioned variably in the support rail. Housing colour black RAL 9005; Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife easy49; Regiolux Classification: netlife easy; Control signal: Switch; Number of control gear (max): 400W LED; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 4m to 14m; Monitoring area: max. 30m x 4m; Remote control: 84501101203; Optional remote control: 84501101200 +App; App name: Steinel smart remote; Application: Industry, Logistics centres, Corridors, Garages; Function: Motion detection, Switch. When used with 7-pole rail, the contacts in the device mount must be reconnected. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife easy system; straightforward in-house project engineering; easy installation; preset functions; simple commissioning via remote control, app, DIP switch, rotary knob, etc.

CHARACTERISTICS

Order number	19152700494
EAN number	4020863465170
Commodity code	85365080
Certification mark	IP 54, CE
Special properties	Advanced Services

ELECTRICAL ENGINEERING

Controller	easy49
Mains voltage	230V/50Hz

MECHANICS



Housing colour	black RAL 9005
Dimensions (LxWxH/DxH)	765mm x 95mm x 88mm
Weight (net)	0.9kg
Type of installation	Mounting rail system installation, Light structure

Dimensions

L	765 mm	Length
B	95 mm	Width
H	88 mm	Height

DEEP-LINK


<a href="https://www.regiolux.de/en/article/19152700494">https://www.regiolux.de/en/article/19152700494</a>
---



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	Switch
Number of control gear (max)	400W LED
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	4m to 14m
Remote control	84501101203
Optional remote control	84501101200 +App
App name	Steinel smart remote
Application	Industry, Logistics centres, Corridors, Garages
Function	Motion detection, Switch

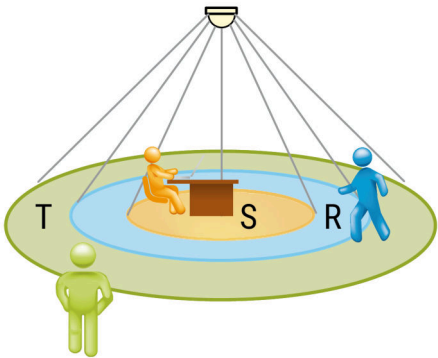

MONITORING AREA

Mounting Height	5m	10m	14m
Ø max. sitting[S]	-	-	-
Ø max. radial[R]	13,5x3,5m	27,5x3,5m	30x3,5m
Ø max. tangential[T]	13,5x3,5m	27,5x3,5m	30x3,5m

