

IP 54 variable Device mount functional module netlife light management

Device mounts made of galvanised, profiled sheet steel with zinc coating combined with polyester resin paint guarantee good corrosion protection; tool-free attachment with integrated rotary catches for rapid fitting in the support rail. Integrated end faces made of plastic with sealing lips and an all-round closed seal to the support rail for a protection type up to IP54. For integrating sensor technology and the control unit into the light run; can be positioned variably in the support rail. Housing colour traffic white RAL 9016; Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife pro13; Regiolux Classification: netlife pro; Control signal: DALI2 (Part 303, 304); Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 2m to 10m; Monitoring area: max. D=48m; System compatibility: central DALI2 controller; DALI system power: 7mA; Application: Industry, Logistics centres; Function: Motion detection, Corridor function, Guided Light, Daylight control, presence detection. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife pro; programmable systems; project engineering support by Regiolux; more complex installation; free functions and multiple settings; visualisation; programming and commissioning; interconnectivity and radio solutions; IoT and cloud-capable

CHARACTERISTICS

| | |
|--------------------|--|
| Order number | 19152700130 |
| EAN number | 4020863421473 |
| Commodity code | 90328900 |
| Certification mark | IP 54, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE |
| Special properties | Advanced Services |

ELECTRICAL ENGINEERING

| | |
|------------|-------|
| Controller | pro13 |
|------------|-------|

MECHANICS



| | |
|------------------------|---|
| Housing colour | traffic white RAL 9016 |
| Dimensions (LxWxH/DxH) | 765mm x 102mm x 99mm |
| Weight (net) | 0.9kg |
| Type of installation | Mounting rail system installation, Light structure |

Dimensions

| | | |
|---|--------|--------|
| L | 765 mm | Length |
| B | 102 mm | Width |
| H | 99 mm | Height |

DEEP-LINK


<https://www.regiolux.de/en/article/19152700130>



LC SYSTEM

CHARACTERISTICS

| | |
|-------------------------------|---|
| Regiolux Classification | netlife pro |
| Control signal | DALI2 (Part 303, 304) |
| Communication | Wired |
| Sensor technology | PIR - passive infrared |
| Installation height (min/max) | 2m to 10m |
| System compatibility | central DALI2 controller |
| DALI system power | 7mA |
| Application | Industry, Logistics centres |
| Function | Motion detection, Corridor function, Guided Light, Daylight control, presence detection |

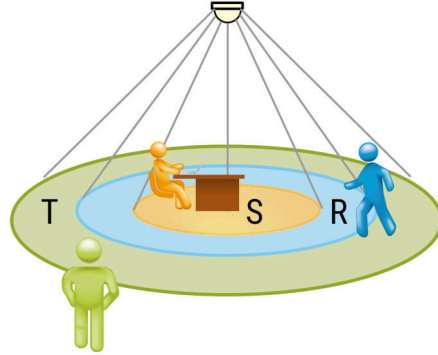

MONITORING AREA

| | | |
|----------------------|------|-----|
| Mounting Height | 2,5m | 10m |
| Ø max. sitting[S] | 6,4m | - |
| Ø max. radial[R] | 8m | 16m |
| Ø max. tangential[T] | 24m | 48m |

