

Recessed luminaire - Opal diffuser - direct distribution

Sheet steel housing suitable for ceilings with visible T-rails; protection rating refers to visible luminaire surface; Housing colour traffic white RAL 9016; Direct light distribution using opal acrylic diffuser. Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts; With changeover converter for emergency lighting operation on request.

CHARACTERISTICS

Order number	72205016680
EAN number	4020863266241
Commodity code	94051190
Certification mark	IP 54/20, Protection class I, F, F-"roof" mark, HACCP DIN10500/Food/IFS/BRC, Indoor, CE
Impact resistance (IK rating)	IK03
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

ELECTRICAL ENGINEERING


Controller	Electronic driver DALI2 (1 pcs.)
System output	28W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	13 pieces/B10, 24 pieces/B16, 25 pieces/C10, 40 pieces/C16
Energy efficiency class/light source	C

LIGHTING TECHNOLOGY


Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Nominal luminous flux	4265lm
LED service life	50000h L90/B10 (Tq 25°C)
Luminaire luminous efficiency	153lm/W
UGR lat./long.	20.7 / 20.6

MECHANICS

Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	622mm x 622mm x 81mm
Depth	81mm
Ceiling system	Ceilings with visible T-rails [s-TS] (625x625 mm)
Installation depth	180mm [s-TS]; 180mm [s-TS] min
Weight (net)	4.5kg
Type of installation	Recessed mounting

DEEP-LINK
<https://www.regiolux.de/en/article/72205016680>


Reference	LED 4300lm 840
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	20.7 / 20.6

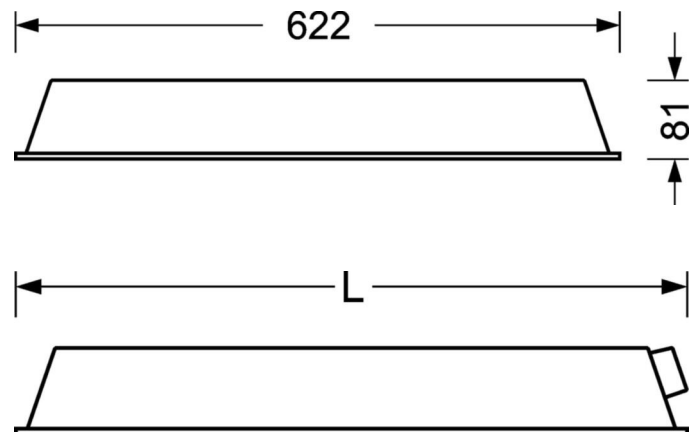

Dimensions

L	622 mm	Length
B	622 mm	Width
H	81 mm	Height
T	81 mm	Depth
Et(min)	180 mm	Ceiling distance minimum - minimum dimension (visible T-rail)
Et(TS)	180 mm	Ceiling distance minimum - recommended (visible T-rail)
MLTS1	625 mm	Module dimension length (visible T-rail)
MLTS_1/2	625	Module dimension length (visible T-rail) 1/2
MBTS1	625 mm	Module dimension width (visible T-rail)
MBTS_1/2	625	Module dimension width (visible T-rail) 1/2
