

Recessed luminaire - Micro-prismatic diffuser - direct distribution

Sheet steel housing suitable for ceilings with visible T rails, concealed symmetrical rail constructions and cut-out ceilings; protection rating refers to visible luminaire surface; Housing colour traffic white RAL 9016; Direct light distribution using microprismatic pane made of acrylic glass with natural anodised aluminium frame; neutral white light colour (840) with very good colour consistency and high colour rendering  $R_a > 80$  for workstations,  $65^\circ < 3000 \text{ cd/m}^2$  with omnidirectional glare suppression according to current DIN-EN 12464-1 standard; Electrical connection via 3-pole connection terminal with plug-in contacts.; With changeover converter for emergency lighting operation on request. An extractor is included for prismatic and frosted panes to remove the sealing frame. UBM universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT locking clips for ceilings with visible T rails: please order separately.

## CHARACTERISTICS

Order number	72532034150
EAN number	4020863289868
Commodity code	94051190
Certification mark	IP 54, Protection class I, VDU 65° < 3000, F, HACCP DIN10500/Food/IFS/BRC, Indoor, CE
Impact resistance (IK rating)	IK03
Ambient temperatur	ta 25°C
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

## ELECTRICAL ENGINEERING

Controller	Electronic driver (1 pcs.)
System output	25W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	19 pieces/B10, 30 pieces/B16, 31 pieces/C10, 50 pieces/C16
Energy efficiency class/light source	C

## LIGHTING TECHNOLOGY


Placement	LED, Colour rendering/Light colour CRI $\geq 80$ / 4000K
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RG0
Nominal luminous flux	4291lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	170lm/W
UGR lat./long.	18.1 / 19.1

## MECHANICS


Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	1197mm x 297mm x 89mm
Depth	82mm
Ceiling system	ceilings with visible T-rails [s-TS] (300x1200 mm), Concealed symmetrical rail construction [VS] (300x1200 mm), cut-out ceilings [AD]
Ceiling cut-out (LxW/D)	1185mm x 285mm
Installation depth	150mm [AD]; 250mm [s-TS]; 150mm [s-TS] min; 150mm [VS]
Weight (net)	6.65kg
Type of installation	Recessed mounting, Ceiling installation individual mounting

## DEEP-LINK

<https://www.regiolux.de/en/article/72532034150>



Reference	LED 4300lm 840
$\eta_{LB}$	100 %
$\Phi_{\downarrow/\uparrow}$	100 % / 0 %
UGR lat./long.	18.1 / 19.1
VDU	65° < 3000cd/m²

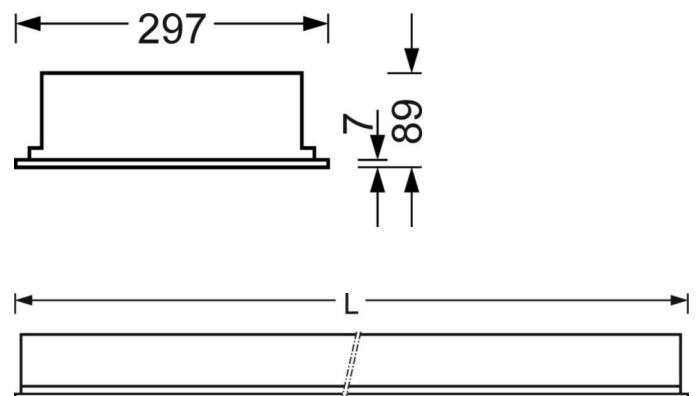

## Dimensions

---

<b>L</b>	1197 mm	Length
<b>B</b>	297 mm	Width
<b>H</b>	89 mm	Height
<b>T</b>	82 mm	Depth
<b>DA(L)</b>	1185 mm	Cutting dimension length
<b>DA(B)</b>	285 mm	Cutting dimension width
<b>DS min</b>	15 mm	Ceiling thickness minimum
<b>DS max</b>	40 mm	Ceiling thickness maximum
<b>Et(min)</b>	150 mm	Ceiling distance minimum - minimum dimension (visible T-rail)
<b>Et(AD)</b>	150 mm	Ceiling distance minimum (cut-out ceiling)
<b>Et(TS)</b>	250 mm	Ceiling distance minimum - recommended (visible T-rail)
<b>Et(VS)</b>	150 mm	Ceiling distance minimum (concealed symmetrical)
<b>MLTS1</b>	1200 mm	Module dimension length (visible T-rail)
<b>MLTS_1/2</b>	1200	Module dimension length (visible T-rail) 1/2
<b>MLVS</b>	1200 mm	Module dimension length (concealed symmetrical)
<b>MBTS1</b>	300 mm	Module dimension width (visible T-rail)
<b>MBTS_1/2</b>	300	Module dimension width (visible T-rail) 1/2
<b>MBVS</b>	300 mm	Module dimension width (concealed symmetrical)

---