

Surface-mounted luminaire - Fresnel lens - direct asymmetrical distribution

Steel sheet enclosure, compact rectangular cross section, installation height 40mm; integrated Quicklock quick-fit bracket system with arrester hook and safety cable for quick and easy installation; Housing colour traffic white RAL 9016; Direct asymmetric radiant light distribution using Fresnel lens made of PMMA, homogeneous light distribution in beam direction; Easy installation of the connection, directly on the top of the luminaire with a terminal cover cap. Electrical connection via 5-pole connection terminal with plug-in contacts.. Light Control: netlife flex54; Regiolux Classification: netlife flex; Control signal: DALI broadcast, Radio; Number of control gear (max): 20; DALI-output nom.: 40mA; Communication: Bluetooth; Sensor technology: PIR - passive infrared; Installation height (min/max): 2m to 3m; Monitoring area: max. D=12m; App name: Hytronik Koolmesh; System compatibility: easy25, flex44, flex50, flex54, flex55, flex56; Note: Can be linked to further Hytronik Koolmesh controllers.; System extension: flex54, flex55; Application: Office, Corridors, Secondary rooms, Meeting rooms, Classrooms; Function: Motion detection, Daylight control, Corridor function, Guided Light, HCL (only with DT8 luminaires), Tunable white (only with DT8 luminaires), Manual dimming. For pendant mounting, order AVAWF-LB continuous row connector and, if necessary, additional AVAWF-SAE wire suspension separately, depending on the number of luminaires. Surface-mounted luminaire for ceiling installation.

## CHARACTERISTICS

Order number	65713066190
EAN number	4020863479276
Commodity code	94051190
Certification mark	IP 20, Protection class I, F, Indoor, CE
Impact resistance (IK rating)	IK03
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years

## ELECTRICAL ENGINEERING

Controller	Electronic driver DALI (1 pcs.)
Light Control	netlife flex54
System output	34W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	13 pieces/B10, 24 pieces/B16, 25 pieces/C10, 40 pieces/C16
Energy efficiency class/light source	B

## LIGHTING TECHNOLOGY


Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RG0
Nominal luminous flux	3734lm
LED service life	70000h L80/B10 (Tq 25°C), 50000h L90/B50 (Tq 25°C)
Luminaire luminous efficiency	111lm/W
UGR lat./long.	24.1 / 26.6

## MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxDxH)	1248mm x 129mm x 62mm
Weight (net)	4.1kg
Cable entry KE (X/Y)	0mm/0mm
Type of installation	Ceiling-mounted single installation, Ceiling-mounted trunking installation

## DEEP-LINK

<https://www.regiolux.de/en/article/65713066190>




Reference	LED 3700lm 840
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	24.1 / 26.6

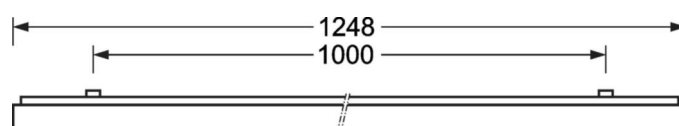

## Dimensions

L	1248 mm	Length
B	129 mm	Width
H	62 mm	Height
A1	1000 mm	Mounting distance single mounting
A3	248 mm	Mounting distance between luminaires in a light run arrangement
A4	50 mm	Mounting distance (width)
X	0 mm	Distance cable infeed to the center of the luminaire on the X-axis
Y	0 mm	Distance cable infeed to the center of the luminaire on the Y-axis

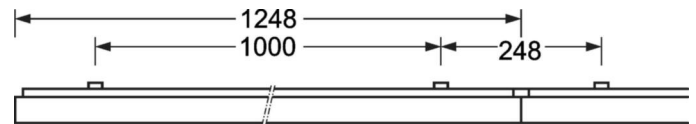

## LC SYSTEM

### CHARACTERISTICS

<b>Regiolux Classification</b>	netlife flex
<b>Control signal</b>	DALI broadcast, Radio
<b>Number of control gear (max)</b>	20
<b>DALI-output nom.</b>	40mA
<b>Communication</b>	Bluetooth
<b>Sensor technology</b>	PIR - passive infrared
<b>Installation height (min/max)</b>	2m to 3m
<b>App name</b>	Hytronik Koolmesh
<b>System compatibility</b>	easy25, flex44, flex50, flex54, flex55, flex56
<b>Note</b>	Can be linked to further Hytronik Koolmesh controllers.
<b>System extension</b>	flex54, flex55
<b>Application</b>	Office, Corridors, Secondary rooms, Meeting rooms, Classrooms
<b>Function</b>	Motion detection, Daylight control, Corridor function, Guided Light, HCL (only with DT8 luminaires), Tunable white (only with DT8 luminaires), Manual dimming

### MONITORING AREA

<b>Mounting Height</b>	3m
<b>Ø max. sitting[S]</b>	-
<b>Ø max. radial[R]</b>	12m
<b>Ø max. tangential[T]</b>	12m

