

Suspended luminaire/light run feed luminaire - Single micro louvre with 80° lens - direct asymmetrical distribution

Enclosure of sheet steel in a delicate rectangular design; white, die-cast aluminium end faces Housing colour traffic white RAL 9016; Light distribution directly asymmetrically radiating by means of a clear LED lens with single micro louvre, white. Electrical connection via integrated white connection cable 5x0.75mm², length 1900mm, stripped cable ends. Complete height-adjustable suspension set with canopy is included in delivery. Black housing possible on request.

CHARACTERISTICS

Order number	60675046630
EAN number	4020863467549
Commodity code	94051190
Certification mark	IP 20, Protection class I, F, Indoor, CE
Impact resistance (IK rating)	IK02
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

ELECTRICAL ENGINEERING

Controller	Electronic driver DALI2 (1 pcs.)
System output	36W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	12 pieces/B10, 20 pieces/B16, 21 pieces/C10, 33 pieces/C16
Energy efficiency class/light source	B

LIGHTING TECHNOLOGY

Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RG1
Nominal luminous flux	4659lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	129lm/W
UGR lat./long.	24.6 / 21.5

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxDxH)	1411mm x 51mm x 69mm
Weight (net)	3.7kg
Type of installation	Pendant individual mounting, Pendant light strip mounting

Dimensions

L	1411 mm	Length
B	51 mm	Width
H	69 mm	Height
A1	1200 mm	Mounting distance single mounting
P min	150 mm	Minimum suspension length
P max	1900 mm	Maximum suspension length

DEEP-LINK

<https://www.regiolux.de/en/article/60675046630>

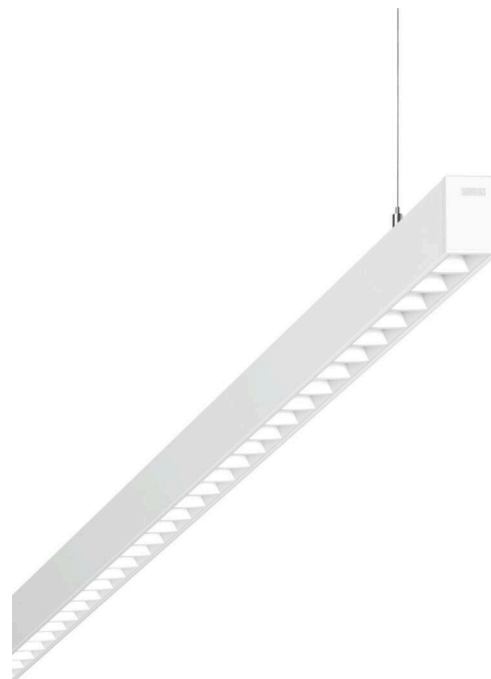

Reference	LED 4700lm 840
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	24.6 / 21.5

