

Suspended luminaire/light run - Micro-prismatic diffuser - direct/indirect distribution

Sheet steel enclosure; rectangular cross-section; including luminaire connectors made of steel; Housing colour traffic white RAL 9016; Homogeneous direct/indirect light distribution for VDU compatibility in accordance with the standard DIN EN 12464-1; glare reduction through microprism diffuser with special "multilayer" technology and optimised light deflecting foil; Electrical connection via 3-pole connection terminal with plug-in contacts. Luminaire can only be operated in conjunction with a single luminaire; The ETM levels can easily be adjusted from the top of the luminaire. SAY-DS suspension and luminaire connector are also included in the scope of delivery. For a light run arrangement, an AVHI initial luminaire with integrated canopy is required for the electrical connection.

CHARACTERISTICS

Order number	65731014170
EAN number	4020863453740
Commodity code	94051190
Certification mark	IP 20, Protection class I, VDU 65° < 3000, ENEC10 VDE, F, Indoor, CE
Impact resistance (IK rating)	IK03
Ambient temperatur	ta 25°C
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

ELECTRICAL ENGINEERING

Controller	Electronic multi-lumen driver, 4-steps (1 pcs.)
System output	51W-28W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	15 pieces/B10, 25 pieces/B16, 24 pieces/C10, 38 pieces/C16
Energy efficiency class/light source	C

LIGHTING TECHNOLOGY


Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 3000K
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RGO
Nominal luminous flux/switching steps (EDM)	6400lm/50W, 5500lm/43W, 4700lm/35W, 3800lm/28W (Standard setting 6400lm)
LED service life	70000h L80/B10 (Tq 25°C), 50000h L90/B50 (Tq 25°C)
Luminaire luminous efficiency	136lm/W-126lm/W
UGR lat./long.	16.0 / 16.3 (51W)

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	1548mm x 239mm x 55mm
Weight (net)	8.5kg
Type of installation	Pendant light strip mounting

DEEP-LINK

<https://www.regiolux.de/en/article/65731014170>



Reference	LED 51W 6400lm 830
ηLB	100 %
Φ ↓/↑	67 % / 33 %
UGR lat./long.	16.0 / 16.3
VDU	65° < 3000cd/m²

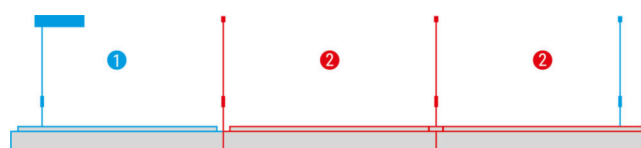

- 1 Pendel-Einzelleuchte / Suspended individual luminaire
- 2 Pendel-Lichtband / Suspended light run

Dimensions

L	1548 mm	Length
B	239 mm	Width
H	55 mm	Height
A1	1300 mm	Mounting distance single mounting
A2	1424 mm	Mounting distance 1st luminaire of the light run
A3	1548 mm	Mounting distance between luminaires in a light run arrangement
P min	150 mm	Minimum suspension length
P max	1900 mm	Maximum suspension length

