

netlife light management function module device mount

Blank cover made of galvanised, profiled sheet steel; surface with polyester resin enamel coating; with two rotary catches for rapid fitting in the mounting rail, for the integration of sensors and control unit in the light run; Housing colour traffic white RAL 9016; Light Control: netlife easy06; Regiolux Classification: netlife easy; Control signal: Switch; Number of control gear (max): 1100VA; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 2m to 10m; Monitoring area: max. D=48m; Remote control: 84506027100; Optional remote control: 84506021200 +App; App name: B.E.G. One; System extension: easy19; Application: Corridors, Garages, Industry, Logistics centres, Secondary rooms, Office, Meeting rooms; Function: Motion detection, presence detection, Switch. Wired ready for connection via integrated connector. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system.

CHARACTERISTICS

| | |
|--------------------|-------------------|
| Order number | 84186001200 |
| EAN number | 4020863296163 |
| Commodity code | 90328900 |
| Certification mark | IP 20, Indoor, CE |
| Special properties | Advanced Services |

ELECTRICAL ENGINEERING

| | |
|---------------|-----------|
| Controller | easy06 |
| Mains voltage | 230V/50Hz |

MECHANICS



| | |
|----------------------|-----------------------------------|
| Housing colour | traffic white RAL 9016 |
| Dimensions (LxWxDxH) | 1532mm x 102mm x 99mm |
| Weight (net) | 1.1kg |
| Type of installation | Mounting rail system installation |

Dimensions

| | | |
|---|---------|--------|
| L | 1532 mm | Length |
| B | 102 mm | Width |
| H | 99 mm | Height |

DEEP-LINK


<https://www.regiolux.de/en/article/84186001200>



LC SYSTEM

CHARACTERISTICS

| | |
|-------------------------------|---|
| Regiolux Classification | netlife easy |
| Control signal | Switch |
| Number of control gear (max) | 1100VA |
| Communication | Wired |
| Sensor technology | PIR - passive infrared |
| Installation height (min/max) | 2m to 10m |
| Remote control | 84506027100 |
| Optional remote control | 84506021200 +App |
| App name | B.E.G. One |
| System extension | easy19 |
| Application | Corridors, Garages, Industry, Logistics centres, Secondary rooms, Office, Meeting rooms |
| Function | Motion detection, presence detection, Switch |

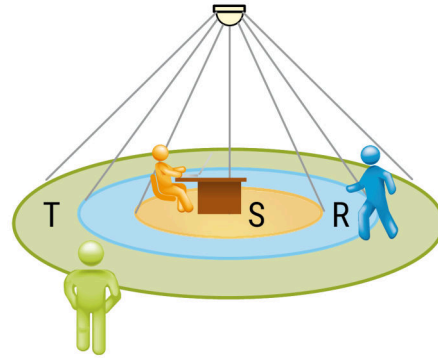

MONITORING AREA

| | | |
|----------------------|------|-----|
| Mounting Height | 3,5m | 10m |
| Ø max. sitting[S] | 9m | - |
| Ø max. radial[R] | - | 16m |
| Ø max. tangential[T] | - | 48m |

